

Merry Fisher

695 Série 2

Merry Fisher 695 Série 2 - 11/2020

S U M M A R Y

- > SPECIFICATIONS
- > KEY POINTS
- > EXTERIOR
- > INTERIOR
- > ATMOSPHERES
- > ELECTRONIC PACKAGES
- > TECHNICAL DATAS



JEANNEAU



MAIN SPECIFICATIONS

Overall length :			
Without options	6,71 m / 22'0"	Cabin	1
With options	7,45 m / 24'5"	Berths	4
Hull length	6,45 m / 21'1"	Max engine power	
Overall beam	2,54 m / 8'4"		175 CV / 129 Kw
Draft	0,50 m / 1'7"	Engine shaft length	Long (508 mm)
Air draft	2,31 m / 7'6"	EC category	C – 8
Weight (without engine)	1625 Kg / 3583 lbs	Designers	Centkowski & Denert design /
Fuel capacity	170 L / 44,9 US gal		Jeanneau design
Water capacity (option)	50 L / 13,2 US gal		

PRESENTATION

LEGENDE

The « LEGEND » versions express for Jeanneau classicism, aestheticism and « club » atmosphere of powerboat. The Merry Fisher 695 Serie 2 LEGEND, with its navy blue hull, embodies this new spirit.

SPECIFICATIONS

Navy blue hull



SPIRIT OF A WEEKENDER, STARTING AT 7 METERS !

The MERRY FISHER 695 SERIE2 can boast of building on the success of the first MERRY FISHER 695, of which over 1400 boats have been sold since September of 2014! The MERRY FISHER 695 SERIE2 already promises to be a future best seller.

This model offers all the strengths of her predecessor, while benefiting from the most recent innovations of the line, and notably those of the MERRY FISHER 795, a true family cruiser in a tailor-made version!

With her stable and generously sized tapered V-shaped hull, the MERRY FISHER 695 SERIE2 has no need to further prove her seaworthy qualities. The model delivers excellent performance and just the right engine power to offer low maintenance and low fuel consumption at an affordable cost.

This safe and very liveable, seaworthy boat is designed for coastal cruising with friends and family.

EXTERIOR

The MERRY FISHER 695 SERIE2 features the attractive, dynamic design of the MERRY FISHER line, with its very large windows in the hull and distinguished signature look.

In the aft cockpit, more space is accorded for a greater sense of well-being. The large U-shaped saloon transforms into a sundeck. The new bench seat frees additional space and slides forward, enabling the engine to be fully raised.

INTERIOR

The MERRY FISHER 695 SERIE2 benefits from the new generation signature style, with large windows in the hull and an incredibly bright interior. While seated in the cockpit, the view of the sea is breathtaking!

On the interior, ease of use is optimised. Beneath the saloon is a novel and very generously sized dedicated storage space for all your cruising equipment.

The model also features a co-pilot bench seat by Jeanneau: in no time, the seat moves from the saloon position to cruising position, to suit diverse preferences and uses.


The new helm station is designed to accommodate a screen of up to 12 inches. The galley can accommodate the installation of an optional gas burner. Comfortable, bright and cleverly designed, the new MERRY FISHER 695 SERIE2 will be a true partner for family coastal cruising!

CHANGES COMPARED TO THE MERRY FISHER 695 Serie 1



Elegant and family friendly boat with a rewarding style

Large handrail

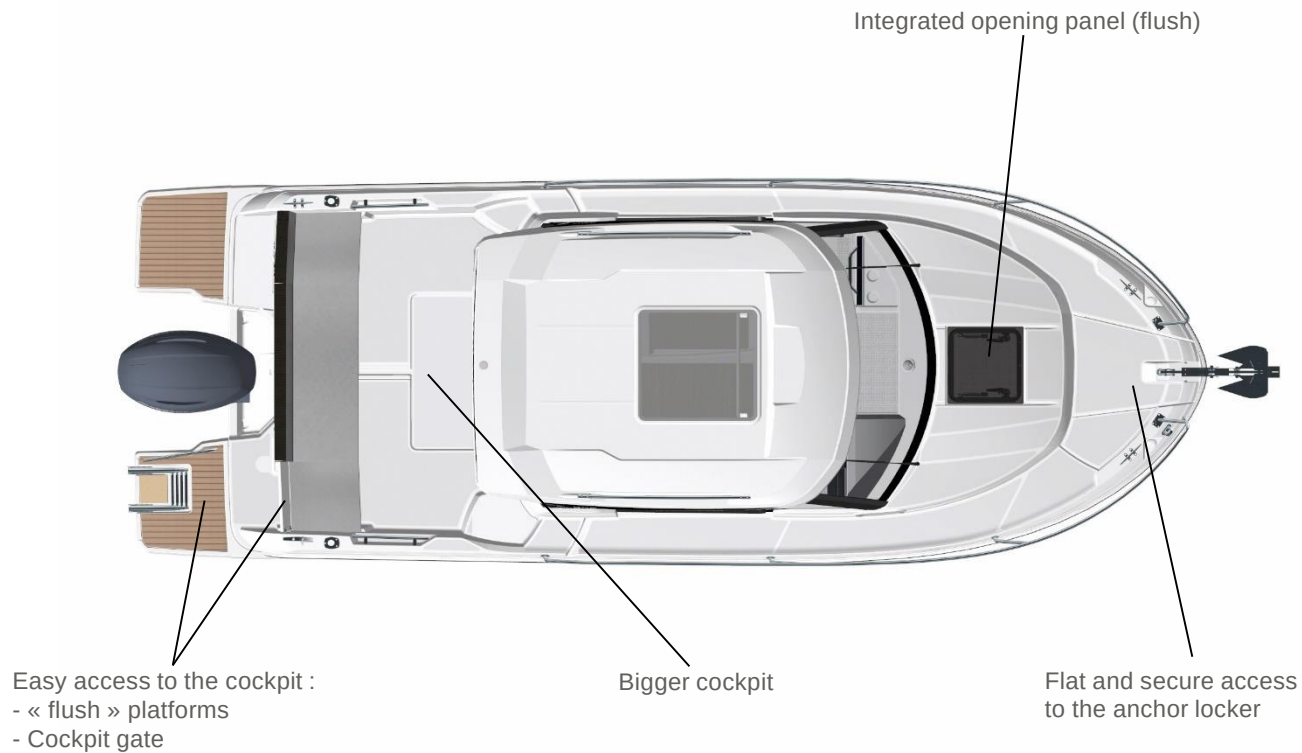




Aft sliding bench with long clearance :

- It enables to expand exterior and interior spaces while the engine is down
- It enables to lift the engine up
- The aft bench remains available when the engine is up

Can be slid with one hand



Standard : aft bench with removable corner seats (fishing)

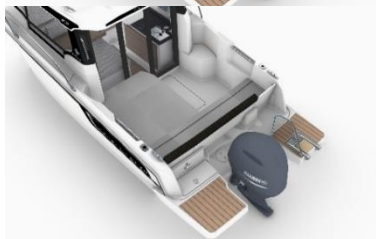

Option : U cockpit salon with a table, convertible into a sunpad



Standard handrails on the roof



New dashboard

GPS up to 12 inches




Standard galley :
Double sink



Option Luxury galley :
Black woktop with stove
+ gas box + sink

Fridge located under the saloon seat :
- Enables to have a double storage in the galley






Copilot bench : **very easy** to transform into saloon bench by simply titling the backrest



Saloon convertible in berths using the table as support (option)


New large storage under the saloon :

It enables to store the exterior upholstery

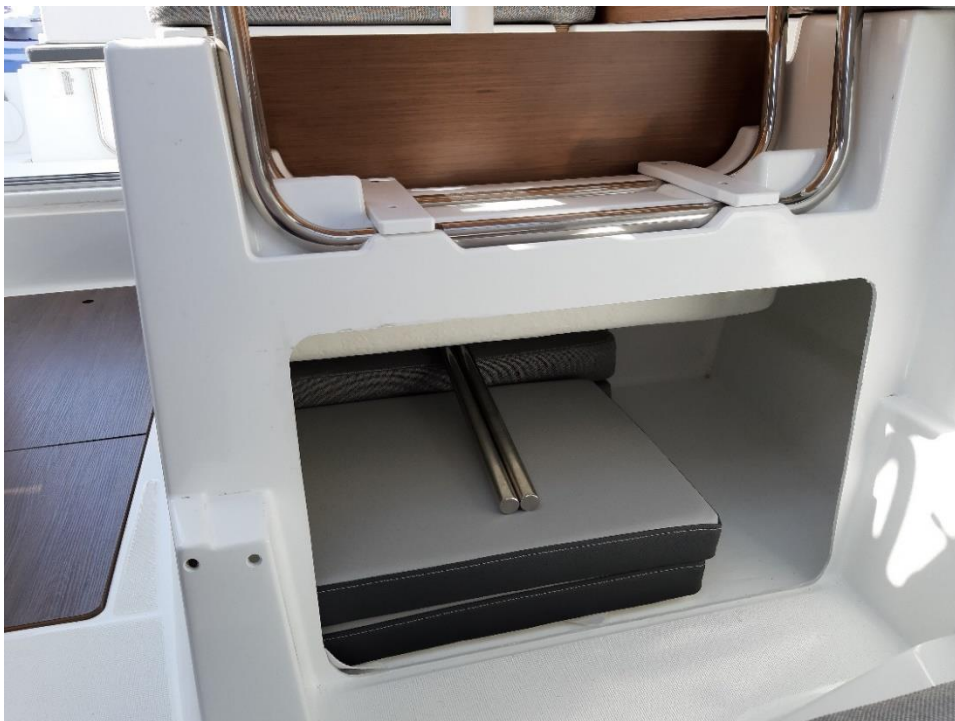


2 TYPES OF LAYOUTS

WITHOUT ENCLOSED COMPARTMENT : MAXIMUM SPACE

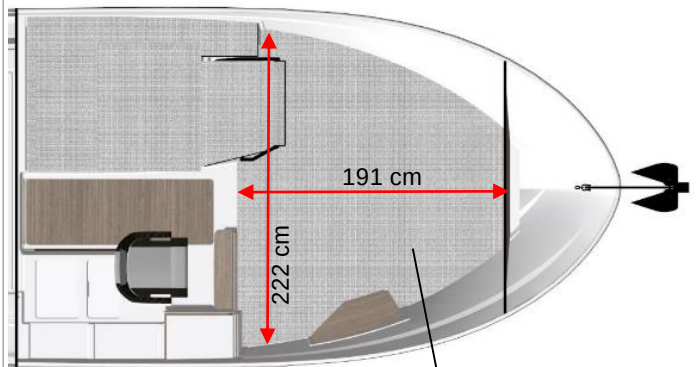

Large berth in the front (option)

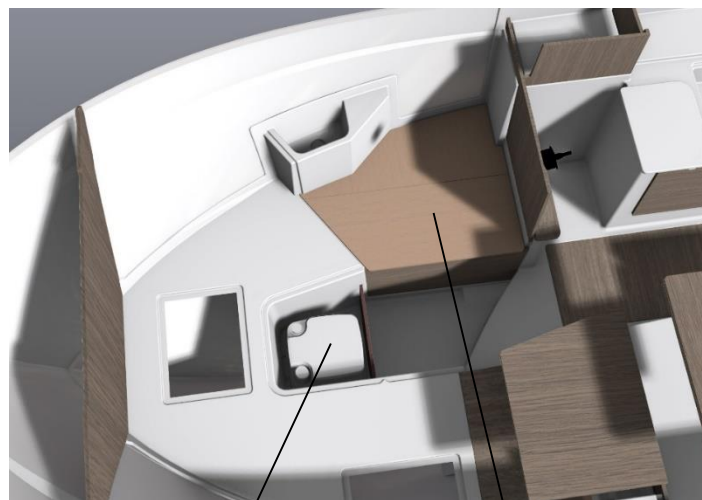

Chemical toilets
between berths (option)

Large storage box
under the berth


2 TYPES OF LAYOUTS

WITH ENCLOSED COMPARTMENT : MORE PRIVACY




Close compartment with sink, can receive :

- Chemical toilets (option)
- Marine toilets + waste tank (option)

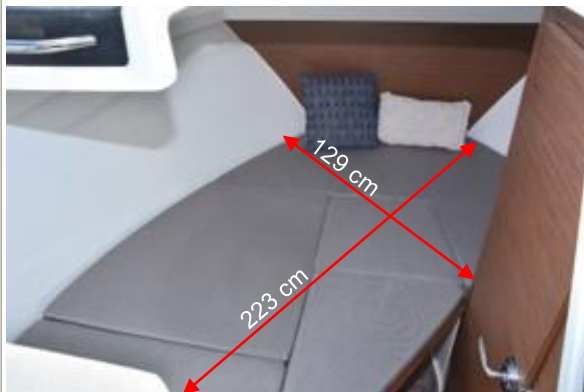

129 cm
223 cm

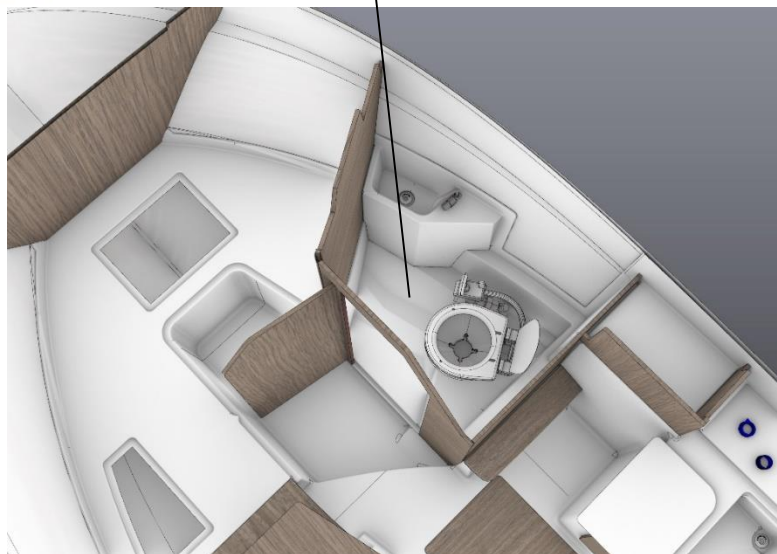



Option : Cockpit sun awning


Option : Cockpit aft closure kit
(requires cockpit sun awning option)

Design : Jeanneau - NV

MERRY FISHER


EXTÉRIEUR / EXTERIOR

SELLERIE /
UPHOLSTERY



DIAMANTE
MOONLIGHT /
DIAMANTE
CARBON


CAPOTAGES /
AWNINGS

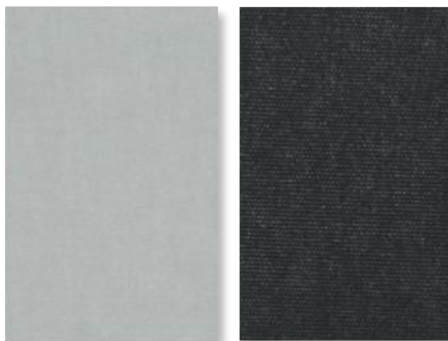

SUNBRELLA
SILVER

SUNBRELLA
GRAPHITE

PROTECTIONS /
COVERS



PVC
STAMOID
WHITE

MERRY FISHER

INTÉRIEUR / INTERIOR

SELLERIE /
UPHOLSTERY



JUMBO
SILVER

MENUISERIES (Standard) /
WOOD

MEUBLES /
FURNITURES

WALNUT


FLOORBOARD /
PLANCHERS

BROWN OAK



ELECTRONIC PACK

ECHOMAP UHD 72cv
Chartplotter/Sonar combo with 7"
keyed-assist touchscreen display.



Garmin GT20-TM
CHIRP Traditional/CHIRP ClearVü
Depth and Temperature

UPGRADE

1 ECHOMAP UHD 92sv (9") INSTEAD OF AN ECHOMAP UHD 72cv (7")

ECHOMAP UHD 92sv
Chartplotter/Sonar combo with 9"
keyed-assist touchscreen display.



LONGUEUR ARBRES MOTEURS / HEIGHT OF OUTBOARD ENGINES SHAFTS

		Pied d'embase / Shaft length	Longueur en mm / Length in mm	Longueur en pouces / Length in inches	YAMAHA	MERCURY	HONDA	SUZUKI
Merry Fisher 605 Série² / 605 Marlin	mono / single	LONG	508	20"	TL	L	L	L
Merry Fisher 695 Série² / 695 Marlin Série²	mono / single	LONG	508	20"	TL	L	L	L
Merry Fisher 795 Série² / 795 Marlin	mono / single	EXTRA LONG	635	25"	TX	XL	X	X
Merry Fisher 895 / 895 Marlin	mono / single	ULTRA LONG	762	30"	TU	XXL	XX	XX
	bi-moteur / twin	EXTRA LONG	635	25"	TX	XL	X	X
Merry Fisher 1095 / Merry Fisher 1095 Fly	bi-moteur / twin	ULTRA LONG	762	30"	TU	XXL	XX	XX

RÉGIMES - VITESSES - CONSOMMATION / RPM - SPEED - CONSUMPTION

Bateaux/boats	Moteur Engine	Hélice(s) Propeller(s)	Charge Loading (kg)	Régime maxi (tr/min) Max Rpm	Vitesse maxi (Nœuds) Max speed (Knots)	Conso (L/h) Consumption n (L/h)	Régime croisière (tr/min) Cruising Rpm	Vitesse croisière (Nœuds) Cruising speed (Knots)	Conso (L/h) Consumption n (L/h)
Merry Fisher 605 Serie 2	YAMAHA F100 DETL	K12 TALON	2122 Kg	5800	24,1	38,9	5000	19,3	35,1
	YAMAHA F115 BETL	K12 TALON	2122 Kg	6300	26,3	41,9	5000	19,1	25,7
Merry Fisher 695 Serie 2	YAMAHA F115 BETL	K12 TALON ALU	2042 Kg	5800	23,5	62,1	5000	18,4	42,6
	YAMAHA F150 DETL	M14 Reliance	2111 Kg	5800	31,2	62,1	4500	21,5	34,1
	YAMAHA F175 DETL	M14 Reliance	2147 Kg	5800	33,4	64,7	4500	24,5	34,4
Merry Fisher 795 Serie 2	YAMAHA F150 GETX	M13 Reliance	3371 Kg	5700	26,3	58,2	5000	21,2	42,1
	YAMAHA F200 GETX	M13 Reliance	3364 Kg	5900	29,6	75,1	4500	20,1	38,4
	YAMAHA F225 BETX	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
	YAMAHA F225 DETX	T13 SALTWATER	3422 Kg	5700	32,5	85,2	4500	25,0	53,1
	YAMAHA F250 DETX	T15 SALTWATER	3422 Kg	5600	34,3	97,0	4500	27,1	65,4
	YAMAHA F250 DETX	T13 SALTWATER	3722 Kg	5800	33,2	94,0	4500	24,3	54,2
Merry Fisher 895	YAMAHA 300 DETU	T13 SWSDS	4618 Kg	6000	29,3	101,5	5000	21,3	75,5
	YAMAHA 2 x F & FL 150 DETX	M14 Reliance	5050 Kg	6000	32,2	111,3	4500	20,4	61,6
Merry Fisher 895 Offshore	YAMAHA 2 x F & FL 200 FETX	M15 Reliance SDS	5014 Kg	6000	36,8	149,1	4500	21,2	59,1
Merry Fisher 1095	YAMAHA 2 x F & FL 300 BETU	T15 SALTWATER	7446 Kg	6000	37,6	205,0	4000	23,3	93,8
Merry Fisher 1095 Fly	YAMAHA 2 x F & FL 300 BETU	T15 SALTWATER	8609 Kg	5900	36,2	200,7	4500	25,3	115,7
Merry Fisher 605 Marlin	YAMAHA F100 DETL	K12 TALON	2005 Kg	6000	25,2	38,8	5000	20,2	23,7
	YAMAHA F115 BETL	K12 TALON	2005 Kg	6300	27,3	41,3	5000	20,4	25,3
Merry Fisher 695 Marlin Serie2	YAMAHA F115 BETL	K12 TALON ALU	2140 Kg	6000	22,7	42,1	5000	15,4	26,8
	YAMAHA F150 DETL	M14 Reliance	2133 Kg	5800	30,3	61,2	4500	20,6	33,6
	YAMAHA F175 DETL	M14 Reliance	2222 Kg	5800	31,9	66,2	4500	23,0	36,4
Merry Fisher 795 Marlin	YAMAHA F150 GETX	ND	ND	ND	ND	ND	ND	ND	ND
	YAMAHA F200 FETX	M14 Reliance	2595 Kg	5900	32,0	75,0	4500	23,1	37,6
Merry Fisher 895 Marlin	YAMAHA 2 x F et FL150 DETX	ND	ND	ND	ND	ND	ND	ND	ND
	YAMAHA 2 x F et FL175 CETX	RH/LH 14 RELIANCE	5769 Kg	6000	34,4	129,0	4500	23,9	68,1
Merry Fisher 895 Marlin Offshore	YAMAHA 2 x F & FL 200 GETX	RH/LH 15 RELIANCE	5679 Kg	6000	37,9	152,2	4500	25,7	79,8
	YAMAHA 2 x F & FL 225 FETX	RH/LH 15 SALTWATER	5814 Kg	6000	40,0	175,8	4000	25,8	85,6
	YAMAHA 2 x F & FL 250 DETX	Saltwater T17 & TL17	5233 Kg	6000	43,2	196,2	4000	30,1	87,9

Essai dans les conditions optimum (carène propre, sans antifouling, bateau-lège...) / Trials in the optimum conditions (clean hull - no antifouling - light displacement)

* Consommation totale du bateau / Total consumption of the boat • ** Test fait avec une ancienne référence d'hélice / test done with an old propeller reference

*** Ce montage nécessite l'installation sur le tableau arrière d'un bracket disponible en option / This installation requires the optional mounting bracket on transom • ND = Non Disponible / No Data.

Ces informations sont données à titre indicatif et peuvent varier selon les conditions d'utilisation, de charge etc... / These average datas are given for guidance and may vary according to sailing conditions, loading etc...

RÉGIMES - VITESSES - CONSOMMATION / RPM - SPEED - CONSUMPTION

Merry Fisher 695 serie 2							
		YAMAHA 115cv <u>Caractéristique / Specifications:</u> 2 moteur Hors Bord / Out Board engines: F 115BETL Hélice / Propeller: K12 Talon Alu Capacité carburant / fuel capacity: 170 L 45 USGal Déplacement total du bateau / Total displacement of boat tested: 2042 Kg					
Regime en tours par minute au tableau de bord / RPM on instrument panel	Vitesse en nœuds moyenne au gps / Average speed on gps in knots	Consommation moteur en litres par heure / consumption engine in liter an hour	Rendement / Efficiency (L/NM = Liter per Nautical Mile)	Consommation totale en USGal / heure Total consumption in USGal/h	Rendement / Efficiency (USGal/NM)	Autonomie en miles nautiques (avec réserve 20%) /Range in Nautical Miles (with 20% fuel safety)	Remarques / Comments
600	1,7 Nds	1,8 l/h	1,1L/NM	,48 USGal/h	,29 USGal/NM	124,67 NM	
1000	2,8 Nds	2,8 l/h	1,0L/NM	,74 USGal/h	,27 USGal/NM	133,57 NM	
1500	4,0 Nds	4,4 l/h	1,1L/NM	1,16 USGal/h	,29 USGal/NM	123,64 NM	
2000	5,0 Nds	6,9 l/h	1,4L/NM	1,82 USGal/h	,36 USGal/NM	98,55 NM	
2500	6,1 Nds	10,9 l/h	1,8L/NM	2,88 USGal/h	,47 USGal/NM	76,11 NM	
3000	6,8 Nds	16,2 l/h	2,4L/NM	4,28 USGal/h	,63 USGal/NM	57,09 NM	
3500	7,7 Nds	24,1 l/h	3,1L/NM	6,37 USGal/h	,83 USGal/NM	43,45 NM	
4000	10,7 Nds	27,8 l/h	2,6L/NM	7,34 USGal/h	,69 USGal/NM	52,10 NM	
4500	13,4 Nds	34,1 l/h	2,5L/NM	9,01 USGal/h	,67 USGal/NM	53,44 NM	
5000	18,40 Nds	42,6 l/h	2,3L/NM	11,25 USGal/h	,61 USGal/NM	58,74 NM	
5500	21,3 Nds	52,2 l/h	2,5L/NM	13,79 USGal/h	,65 USGal/NM	55,36 NM	
6000	23,5 Nds	62,1 l/h	2,6L/NM	16,41 USGal/h	,70 USGal/NM	51,36 NM	
<u>Conditions optimales théoriques et purement indicatives des essais: /Optimal theoretical conditions, purely indicative for trials :</u> Coque neuve, vent 5nds, mer belle petit clapot, pas d'antifouling / new hull, wind 5 knots, nice little choppy sea, no antifouling							
11/07/2019							

RÉGIMES - VITESSES - CONSOMMATION / RPM - SPEED - CONSUMPTION

Merry Fisher 695 serie 2							
		YAMAHA 150cv					
		Caractéristique / Specifications:					
		2 moteur Hors Bord / Out Board engines:			F 150DETL		
		Hélice / Propeller:			M14 Reliance		
		Capacité carburant / fuel capacity			170 L	45 USGal	
		Déplacement total du bateau / Total displacement of boat tested:			2111 Kg		
Regime en tours par minute au tableau de bord / RPM on instrument panel	Vitesse en nœuds moyenne au gps / Average speed on gps in knots	Consommation moteur en litres par heure / consumption engine in liter an hour	Rendement / Efficiency (L/NM = Liter per Nautical Mile)	Consommation totale en USGal / heure Total consumption in USGal/h	Rendement / Efficiency (USGal/NM)	Autonomie en miles nautiques (avec réserve 20%) /Range in Nautical Miles (with 20% fuel safety)	Remarques / Comments
600	2,1 Nds	1,8 l/h	,88L/NM	,48 USGal/h	,23 USGal/NM	154,89 NM	
1000	3,4 Nds	2,8 l/h	,82L/NM	,74 USGal/h	,22 USGal/NM	165,14 NM	
1500	4,9 Nds	4,4 l/h	,90L/NM	1,16 USGal/h	,24 USGal/NM	151,45 NM	
2000	6,2 Nds	6,9 l/h	1,11L/NM	1,82 USGal/h	,29 USGal/NM	122,20 NM	
2500	7,2 Nds	10,9 l/h	1,52L/NM	2,88 USGal/h	,40 USGal/NM	89,21 NM	
3000	7,9 Nds	16,2 l/h	2,06L/NM	4,28 USGal/h	,54 USGal/NM	65,90 NM	
3500	11,7 Nds	24,1 l/h	2,06L/NM	6,37 USGal/h	,54 USGal/NM	66,02 NM	
4000	16,4 Nds	27,8 l/h	1,70L/NM	7,34 USGal/h	,45 USGal/NM	80,23 NM	
4500	21,5 Nds	34,1 l/h	1,59L/NM	9,01 USGal/h	,42 USGal/NM	85,75 NM	
5000	24,3 Nds	42,6 l/h	1,76L/NM	11,25 USGal/h	,46 USGal/NM	77,42 NM	
5500	27,7 Nds	52,2 l/h	1,88L/NM	13,79 USGal/h	,50 USGal/NM	72,17 NM	
6000	31,2 Nds	62,1 l/h	1,99L/NM	16,41 USGal/h	,53 USGal/NM	68,33 NM	
-							
Conditions optimales théoriques et purement indicatives des essais: /Optimal theoretical conditions, purely indicative for trials :							
Coque neuve, vent 5nds, mer belle petit clapot, pas d'antifouling / new hull, wind 5 knots, nice little choppy sea, no antifouling							
15/07/2019							

RÉGIMES - VITESSES - CONSOMMATION / RPM - SPEED - CONSUMPTION

Merry Fisher 695 serie 2							
		YAMAHA 175cv					
		<u>Caractéristique / Specifications:</u>					
		2 moteur Hors Bord / Out Board engines: F 175AETL					
		Hélice / Propeller: M14 Reliance					
		Capacité carburant / fuel capacity 170 L 45 USGal					
Déplacement total du bateau / Total displacement of boat tested: 2147 Kg							
Regime en tours par minute au tableau de bord / RPM on instrument panel	Vitesse en nœuds moyenne au gps / Average speed on gps in knots	Consommation moteur en litres par heure / consumption engine in liter an hour	Rendement / Efficiency (L/NM = Liter per Nautical Mile)	Consommation totale en USGal / heure Total consumption in USGal/h	Rendement / Efficiency (USGal/NM)	Autonomie en miles nautiques (avec réserve 20%) /Range in Nautical Miles (with 20% fuel safety)	Remarques / Comments
600	2,3 Nds	1,6 l/h	,71L/NM	,42 USGal/h	,19 USGal/NM	191,25 NM	
1000	3,8 Nds	3,3 l/h	,88L/NM	,87 USGal/h	,23 USGal/NM	154,55 NM	
1500	5,3 Nds	5,5 l/h	1,04L/NM	1,45 USGal/h	,27 USGal/NM	131,05 NM	
2000	6,5 Nds	8,7 l/h	1,34L/NM	2,30 USGal/h	,35 USGal/NM	101,61 NM	
2500	7,6 Nds	12,5 l/h	1,64L/NM	3,30 USGal/h	,43 USGal/NM	82,69 NM	
3000	9,0 Nds	18,8 l/h	2,10L/NM	4,97 USGal/h	,55 USGal/NM	64,74 NM	
3500	11,4 Nds	24,6 l/h	2,17L/NM	6,50 USGal/h	,57 USGal/NM	62,75 NM	
4000	20,1 Nds	27,9 l/h	1,39L/NM	7,37 USGal/h	,37 USGal/NM	97,98 NM	
4500	24,5 Nds	34,4 l/h	1,41L/NM	9,09 USGal/h	,37 USGal/NM	96,66 NM	
5000	27,6 Nds	45,1 l/h	1,63L/NM	11,91 USGal/h	,43 USGal/NM	83,23 NM	
5500	31,5 Nds	56,3 l/h	1,79L/NM	14,87 USGal/h	,47 USGal/NM	76,09 NM	
6000	33,4 Nds	64,7 l/h	1,94L/NM	17,09 USGal/h	,51 USGal/NM	70,10 NM	
Conditions optimales théoriques et purement indicatives des essais: /Optimal theoretical conditions, purely indicative for trials : Coque neuve, vent 5nds, mer belle petit clapot, pas d'antifouling / new hull, wind 5 knots, nice little choppy sea, no antifouling							
11/07/2019							

CERTIFICATION CE / EC REGULATION

Modèles / Models	Certification N° / Regulation N°	Longueur coque* / Hull length*	Largeur coque* / Hull beam*	Charge max / Max load	Catégorie / Category	Personnes / Persons	Puissance / Maxi power		Masse maxi moteur / Max engine weight
							Kw	CV / HP	
Merry Fisher 605 Serie¹	En cours / In progress	5,51 m	2,44 m	936 kg	C	6	90	115	230 Kg
Merry Fisher 605 Marlin	B SPB 18072 MM	5,51 m	2,44 m	1 080 kg	C	6	90	115	230 kg
Merry Fisher 695 Serie²	B SPB 19075 MM	6,45 m	2,49 m	1 460 kg	C	8	137	175	285 kg
Merry Fisher 695 Marlin Serie²	B SPB 19120 MM	6,45 m	2,79 m	1 560 kg	C	8	137	175	285 kg
Merry Fisher 795 Serie²	B SPB 20033 MM	6,97 m	2,77 m	1 840 kg	C	9	200	250	315 kg
Merry Fisher 795 Marlin	B SPB 16160MM	6,97 m	2,93 m	1 640 kg	C	9	147,2	200	284 kg
Merry Fisher 895	B SPB 16144 MM	7,98 m	2,93 m	2 270 kg	C	10	257 2 x 130	350 2 x 175	364 kg 2 x 235 kg
Merry Fisher 895 Offshore	B SPB 16215 MM	7,98 m	2,93 m	2 160 kg	B - C	6 - 10	257 2 x 148	350 2 x 200	364 kg 2 x 291 kg
Merry Fisher 895 Marlin	RCDB 0000092	7,98 m	2,94 m	2 200 kg	C	10	2 x 186	2 x 250	2 x 315 kg
Merry Fisher 895 Marlin Offshore	RCDB 0000092	7,98 m	2,94 m	1 880 kg	B - C	6 - 10	2 x 147	2x200	2 x 290 kg
							2 x 186	2 x 250	2 x 315 kg
Merry Fisher 1095	B SPB 17129 MM	9,94 m	3,35 m	2 740 kg	B - C - D	8 - 10 - 11	2 x 235	2 x 300	2 x 333 kg
Merry Fisher 1095 Fly	B SPB 19076 MM	9,94 m	3,32 m	2 600 kg	B - C - D	7 - 10 - 11	2 x 235	2 x 300	2 x 333 kg

Pour les homologations en cours toutes les informations doivent être considérées comme provisoires. Les catégories et nombre de personnes indiqués correspondent à la demande faite par le chantier et non à une confirmation / When the EC regulation is in progress, please consider all information as provisional. The categories and number of persons written are requested by the Jeanneau Yard, not confirmed.

* Indiqué sur la DEC (Déclaration Ecrite de Conformité) / * Written on the WSC (Written Statement of Compliance) - ND: Non Disponible / No Data.

KIT AMARRAGE - MOUILLAGE / MOORING - ANCHORING KITS

Bateaux / Boats	MOUILLAGE / ANCHORING							AMARRE / MOORING		PARE-BATTAGES / FENDERS	
	Code / Ref	Ancre / Anchor	Chaîne / Chain		Cablot / Line			Code / Ref	Désignation / detail	Code / Ref	Désignation / detail
CC 5.5 CC /WA	162301	8 kg	Plate / Flat	6 mm	13 m	20 m	10 mm	043143	4 x D12 L8000	189031	4 x 645 x D.150
CC 6.5 CC /DC /WA	162302	10 kg	Plate / Flat	8 mm	15 m	25 m	14 mm	043143	4 x D12 L8000	189031	4 x 645 x D.150
CC 7.5 CC /DC /WA	162302	10 kg	Plate / Flat	8 mm	15 m	25m	14 mm	043143	4 x D12 L8000	189031	4 x 645 x D.150
CC 9.0 CC /WA	162304	14 kg	Plate / Flat	8 mm	23 m	35 m	14 mm	043143	4 x D12 L8000	189031	4 x 645 x D.150
CC 10.5 WA Serie ²	162305	16 kg	Plate / Flat	10 mm	28 m	40 m	18 mm	043145	4 x D16 L12000	189032	6 x 635 x D.200
CC 12.5 WA	162305	16 kg	Plate / Flat	10 mm	28m	40 m	18 mm	043145	4 x D16 L12000	189033	6 x 700 x D.250
MF 605 Série ² / 605 Marlin / 695 / 695 Marlin	162302	10 kg	Plate / Flat	8 mm	15 m	25 m	14 mm	043143	4 x D12 L8000	189031	4 x 645 x D.150
MF 795 Serie ²	162303	12 kg	Plate / Flat	8 mm	18 m	30 m	14 mm	043143	4 x D12 L8000	189031	4 x 645 x D.150
MF 795 Marlin	162303	12 kg	Plate / Flat	8 mm	18 m	30 m	14 mm	043143	4 x D12 L8000	189031	4 x 645 x D.150
MF 895	162304	14 kg	Plate / Flat	8 mm	23 m	35 m	14 mm	043143	4 x D12 L8000	189031	4 x 645 x D.150
MF 895 Marlin	162304	14 kg	Plate / Flat	8 mm	23 m	35 m	14 mm	043143	4 x D12 L8000	189031	4 x 645 x D.150
MF 1095 / MF 1095 Fly	162305	16 kg	Plate / Flat	10 mm	28 m	40 m	18 mm	043145	4 x D16 L12000	189032	6 x 635 x D.200



COLISAGE GAMME MERRY FISHER
PACKING DIMENSIONS MERRY FISHER RANGE

	Longueur HT Length overall (m) STANDARD WITH PLATFORMS	Longueur HT Length overall (m) STANDARD	Largeur HT Width overall (m)	Hauteur HT Height overall (m)	Hauteur s/ber Height on cradle (m)	Poids estimatif Estimated weight (kg)	Volume sur ber Volume on cradle (m ³)
MERRY FISHER 605 Serie ²	6,25	5,66	2,46	2,51	2,67	1200	37,18
MERRY FISHER 605 MARLIN	6,25	5,67	2,45	2,64	2,73	1027	37,92
MERRY FISHER 695 Serie ²	7,22	6,72	2,54	2,64	2,73	1625	46,60
MERRY FISHER 695 MARLIN Serie ²	7,22	6,72	2,54	2,76	2,85	1552	48,65
MERRY FISHER 795 Serie ²	7,73	7,24	2,82	2,76	2,92	2153	59,62
MERRY FISHER 795 MARLIN	7,71	7,23	2,80	3,05	3,15	2200	63,77
MERRY FISHER 895	8,90	8,90	3,00	3,25	3,34	3500	89,18
MERRY FISHER 895 MARLIN	8,92	8,92	2,99	3,20	3,30	3400	88,01
MERRY FISHER 1095	10,45	10,45	3,37	3,40	3,59	5200	126,43
MERRY FISHER 1095 FLY	10,45	10,45	3,37	3,49*	3,68	5700	129,60
				*minimum 3,97 wheel mounted and no mast			

Weight & Dimensions of OB boats are given without engine

Le poids et les dimensions des bateaux hors bords sont données sans moteurs

INFORMATION SUR LES BATTERIES DES MODÈLES HORS-BORD / INFORMATION ON BATTERIES FOR OUTBOARD MODELS

Rappel : depuis la saison 2016, les batteries NE SONT PLUS LIVREES avec les bateaux hors-bord (batterie(s) moteur, batterie pour frigo, batterie de propulseur). Les concessionnaires doivent commander eux-mêmes les batteries et inclure leur prix dans les devis clients. En dehors des batteries, les autres composants (câblage, connecteurs, ...) continuent d'être livrés selon les inventaires actuels c'est-à-dire en standard, dans les pré-rigings ou en option selon les cas. Ci-dessous sont indiquées les caractéristiques des batteries recommandées.

Reminder: since 2016 season, batteries are NO MORE delivered with outboard boats (engine battery(s), fridge battery, bow thruster battery). Dealers have to order batteries by themselves and to add their prices in boat quotation. Except for batteries, all other components (wiring, connectors, ...) are still delivered according to current rules, i.e. in standard, in pre-rigings or in option.

Hereunder you will find infos and specifications of the recommended batteries.

Bateaux / Boats	Moteur 1 / Engine 1	Moteur 2 / Engine 2	OU / OR	Réfrigérateur / Fridge	Option propulseur / Bow thruster option	Option générateur / Genset option	Climatisation sur batteries / Air conditioning on batteries
Merry Fisher 605 Serie ²	Type 2	/		Type 2	/	/	/
Merry Fisher 605 Marlin	Type 2	/		/	/	/	/
Merry Fisher 695 Serie ²	Type 2	/		Type 2	Type 4	/	/
Merry Fisher 695 Marlin Serie ²	Type 2	/		Type 2	Type 4	/	/
Merry Fisher 795 Serie ²	Type 2	/		Type 2	Type 4	/	Type 7 (2 batteries/2 battery)
Merry Fisher 795 Marlin	Type 2	/		Type 2	Type 4	/	/
Merry Fisher 895	Type 3	Type 3			Type 4	Type 4	/
Merry Fisher 895 Marlin	Type 3	Type 3			Type 4	Type 4	/
Merry Fisher 1095 / Merry Fisher 1095 Fly	Type 2	Type 2	Type 2 (2 batteries/2 battery)		Type 4 (2 batteries/2 battery)	Type 4	/

	Type 2	Type 3	Type 4	Type 7
Description	110AH starting battery	140 AH mixed duty battery (starting + service)	50 AH dry-fit starting battery with low internal resistance (2,2 mOhm)	90 AH Lithium Ion (Lithium fer Phosphate)
Voltage (V)	12V	12V	12 V	12 V
Capacité (Ah) / Capacity	110 Ah (20 h)	140 Ah (20 h)	50 Ah (20 h)	90 Ah
Intensité au démarrage (A) / Cranking	750	750	750	
Endurance	90 cycles @ 50%	300 cycles @ 40%	500 cycles @ 75%	> 5000 cycles
Longueur (mm) / Length	349	513	260	353
Largeur (mm) / Width	175	189	173	175
Hauteur (mm) / Height	235	223	206	190
				13 kg
Position des cosses / Terminal position				
Exemple / Example	Exide Technologie EG1 102	Exide Technologie ER660	Exide Technologie EP450	SUPER 8 Epullion
Prix public indicatif (€ ex.VAT) / Indicative public price	150 €	225 €	200 €	1 665 €



This is not a contractual document.
This document was updated in December 2020
It may contain illustrations or text representing
or referring to optional equipment.
If changes appear on our 2021 models,
with regard to equipment or options referred to in this document,
only the 2021 Jeanneau pricing will apply.

